



A Professional Manufacturer of Display

Manufacturer Certificated



CERT. No.: 282Q19070712006



CERT. No.: 282E19070712007

Product Specification

Model: TTX116BHT-01

11.6" TFT Display Module (1920*1080)

This module uses RoHS material

Tailor Pixels Technology Co., Ltd.

www.tailorpixels.com

tailor@tailorpixels.com

Ph: 86-755-8821 2653

RECORDS OF REVISION

DATE	NO	REVISED No.	PAGE	SUMMARY	NOTE
2022-02-10		Rev01	/	-	


1. Application

This specification applies to a color TFT-LCD Module,

2. Overview

The TFT-LCD Module is a color active matrix TFT LCD FOB using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 11.6 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 16.7M colors. The TFT-LCD panel used for this module is a low reflection and higher color type. The LED Driver for backlight driving is built in this model.

All input signals are eDP1.3 interface compatible.

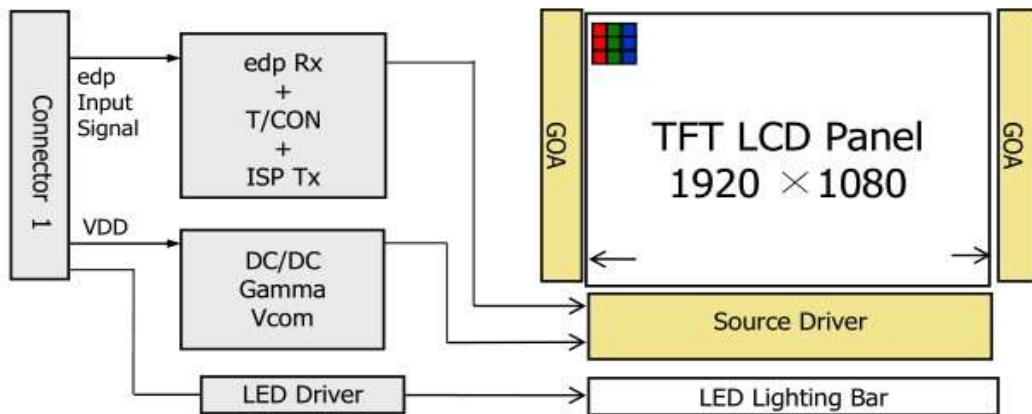

- 2 lane eDP Interface with 2.7Gbps Link Rates
- Thin and light weight
- 8 bit color depth, display 16.7M colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit 6CH
- Low driving voltage and low power consumption
- On board EDID chip

3. Mechanical specifications.

Parameter	Specification	Unit	Note
Display size	11.6" (Diagonal)	inch	
Active area	256.32(H) × 144.18(V)	mm	
Pixel Format	1920(H) × 1080(V) (1pixel = R + G + B Dot)	pixel	
Pixel pitch	0.1335(H) × 0.1335 (V)	mm	
Pixel configuration	R, G, B vertical stripe		
Display mode	Normally black		
Surface treatment of front polarizer	Anti-glare coating: (3H)		

Outline dimensions

Parameter		Min	Typ	Max	Unit	Remark
Unit outline dimensions	Width	267.7	267.9	268.2	mm	
	Height	163.92	164.22	164.52	mm	
	Depth	2.6	2.8	3.0	mm	
Mass		-	-	-	g	

[Note 3-1]Outline dimensions is shown in page 17 [Note 3-2]Without war page and deflection.

4. Input Terminals
4-1 Driving interface of PWB

CN1 (eDP signals, +3.3V DC power supply and B/L power supply)

Pin No.	Symbol	I/O	Function	Remark
1	NC	-	Reserved for CD	
2	H_GND	P	High Speed round	
3	Lane1_N	I	Complement Signal Link Lane 1	
4	Lane1_P	I	True Signal Link Lane 1	
5	H_GND	P	High Speed round	
6	Lane0_N	I	Complement Signal Link Lane 0	
7	Lane0_P	I	True Signal Link Lane 0	
8	H_GND	P	High Speed round	
9	AUX_CH_P	I	True Signal Auxiliary Channel	
10	AUX_CH_N	I	Complement Signal Auxiliary Channel	
11	H_GND	P	High Speed round	
12	LCD_VDD	P	LCD logic and driver power(3.3V)	
13	LCD_VDD	P	LCD logic and driver power(3.3V)	
14	NC	I	Reserved for LCD manufacturer's use	

15	LCD_GND	P	LCD logic and driver ground	
16	LCD_GND	P	LCD logic and driver ground	
17	HPD	O	HPD signal pin	
18	LED-GND	P	Backlight ground	
19	LED-GND	P	Backlight ground	
20	LED-GND	P	Backlight ground	
21	LED-GND	P	Backlight ground	
22	BL_ENABLE	I	Backlight on/off	
23	BL_PWM_DIM	I	System PWM	
24	NC	-	Reserved for LCD manufacturer's use	
25	NC	-	Reserved for LCD manufacturer's use	
26	Vled	P	Backlight power	
27	Vled	P	Backlight power	
28	Vled	P	Vled Backlight power	
29	Vled	P	Backlight power	
30	NC	-	Reserved for LCD manufacturer's use	

*1 P: POWER I: Input O: Output

Note


- Don't input any signals or any powers into a NC pin. Keep the NC pin open.
- The shielding case is connected with signal

GND. • Connector used :20455-030E-76(I-PEX)

- Corresponding connector : 20453-030T (I-PEX)

(Panda is not responsible to its product quality, if the user applies a connector not corresponding to the above model.)

4-2 eDP interface

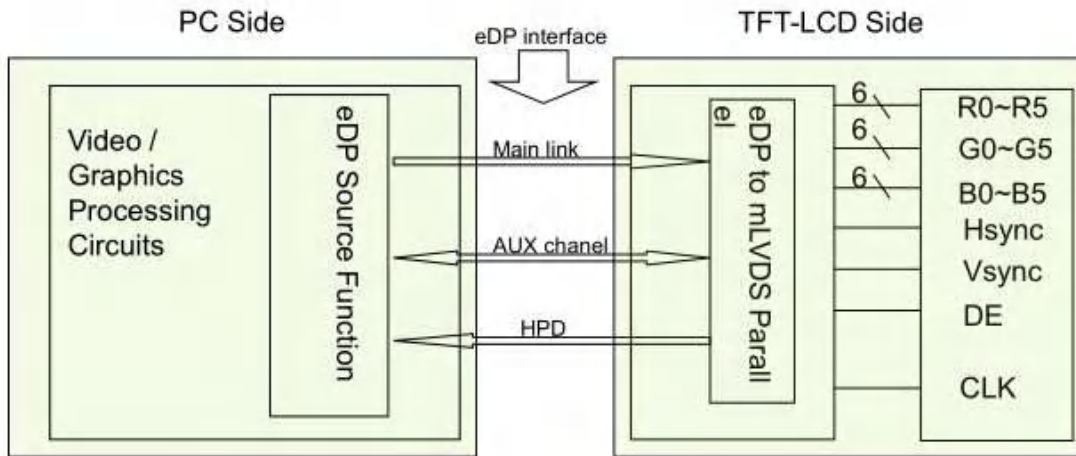

5. Electrical Characteristics 5-1 Absolute Maximum Ratings

Parameter	Symbol	Condition	Ratings		Unit	Remark
			MIN	MAX		
+3.3V supply voltage	VDD	Ta=25°C	-0.3	+3.6	V	
Input voltage(eDP)	VI	Ta=25°C	-0.3	+1.5	V	[Note 5-1]
Storage temperature	Tstg		-10	+60	°C	[Note 5-2]
Operation temperature	Topa		0	+50	°C	


(*) "Absolute Maximum Ratings" is regulations that do not exceed it even momentarily.

(*) Stress beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

[Note 5-1] eDP signals

[Note 5-2] Humidity: 90%RH Max.at Ta ≦ +40°C.

Maximum wet-bulb temperature at +39°C or less at Ta > +40°C, No condensation.

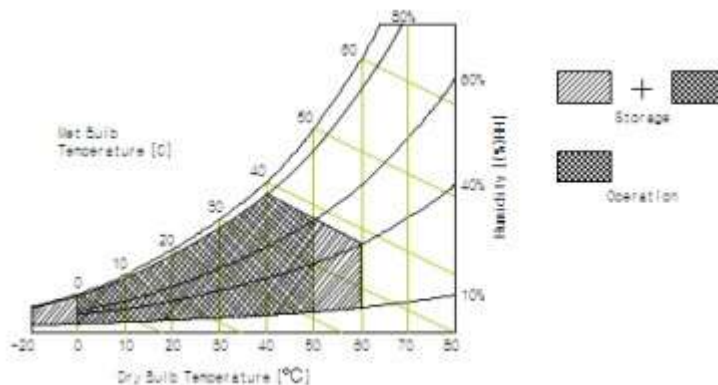


5. DC Characteristics 5-2-1. TFT-LCD panel driving

DC Electrical Characteristics						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
+3.3V supply voltage	VDD	+3.0	+3.3	+3.6	V	[Note 5-2-1]
Current dissipation	IDD	-	-	-	mA	[Note 5-2-2]
Permissible input ripple voltage	VRP	-	-	100	mVp-p	VDD=+3.3V
Differential Peak-to-peak Input Voltage at Rx package pins	$V_{RX-DIFFp-p}$	90		1200	mV	
Power Consumption	P_D	-	0.9	1.4	W	
	P_{BL}	-	-		W	
	P_{TOTAL}	-	-	4.4	W	

[Note 5-2-1] ON-OFF conditions for supply voltage

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

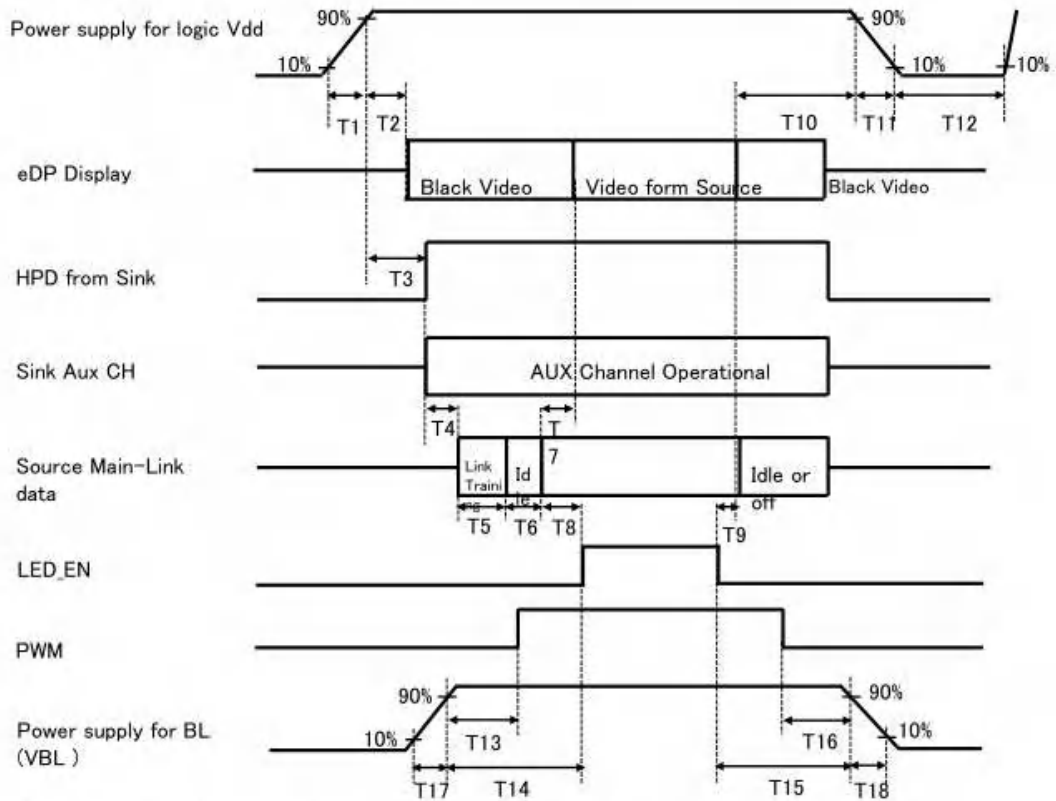

- $0.5\text{ms} \leq T1 \leq 10\text{ms}$
- $0\text{ms} \leq T2 \leq 200\text{ms}$
- $0\text{ms} \leq T3 \leq 200\text{ms}$
- $0\text{ms} \leq T13$
- $0\text{ms} \leq T14$
- $0\text{ms} \leq T17$
- $200\text{ms} < T3+T4+T5+T6+T8$
- $0\text{ms} \leq T7 \leq 50\text{ms}$
- $0\text{ms} \leq T10 \leq 500\text{ms}$
- $3\text{ms} \leq T11 \leq 10\text{ms}$
- $500\text{ms} \leq T12$
- $0\text{ms} \leq T15$
- $0\text{ms} \leq T16$
- $0\text{ms} \leq T18$
- $0\text{ms} < T9$

Notes:


1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

6 Backlight Characteristics

 $T_a=25\pm 2^\circ\text{C}$

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V_F	-	-	-	V	-
LED Forward Current	I_F	0.1	-	25	mA	-
LED Power Consumption	P_{LED}		-	-	W	-
LED Life-Time	N/A	-	-	-	Hour	-
LED Driver Output Voltage	V_{OUT}	-	-	37		
Power supply voltage for LED Driver	V_{LED}	5	12	21	V	
EN Control Level	Backlight on	1.2		5.0	V	
	Backlight off	0		0.6	V	
PWM Control Level	PWM High Level	1.2		5.0	V	
	PWM Low Level	0		0.6	V	
PWM Control Frequency	F_{PWM}	200	-	20,000	Hz	
Duty Ratio	-	1	-	100	%	

- Notes :
1. Power supply voltage 12V for LED Driver
 2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.
 3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.

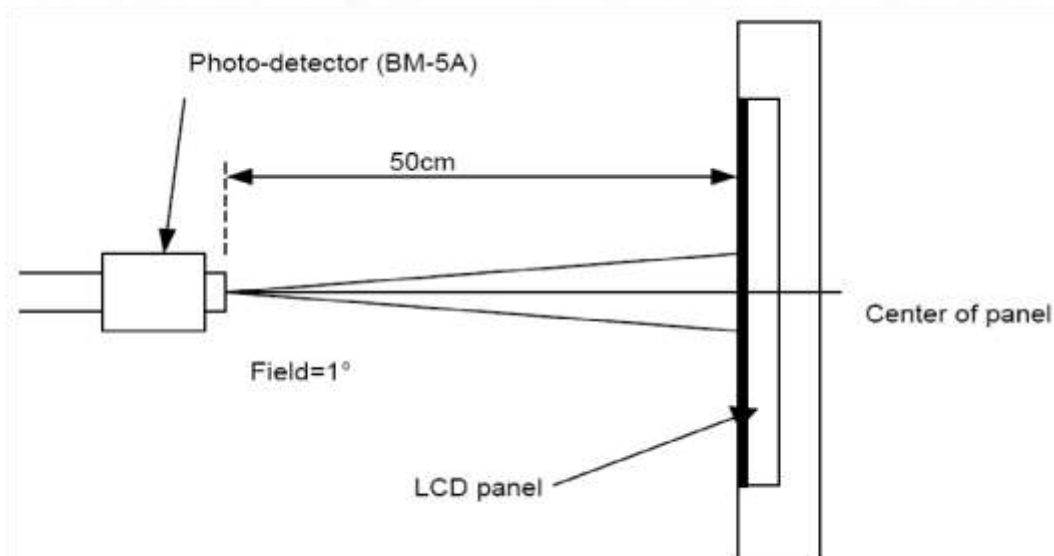

7. Timing characteristics of input signals

7-1. Timing Characteristics

The TFT-LCD Module is operated by the DE only.


VDD=+3.3V~3.6V, Ta=-0~+60°C

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
DCLK Frequency	fclk	100	141.4	160	MHz
Horizontal display area	thd	1920			pixel
HSYNC period time	th	2080	2142	2400	pixel
HSYNC blanking	thb+ thfp	-	222	-	pixel
Vertical display area	Tvd	1080			H
Frequency	fV	40	60	66	Hz
VSYNC period time	Tv	1090	1100	1238	H
VSYNC blanking	Tvb+ Tvfp	-	20	-	H

7-2. eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock	ssc		0.5		%	
Differential peak-to-peak input voltage at package pins	VRX-DIFF _{p-p}	120		1200	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	100	120	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_INTRA_PAIR	-	-	150	ps	

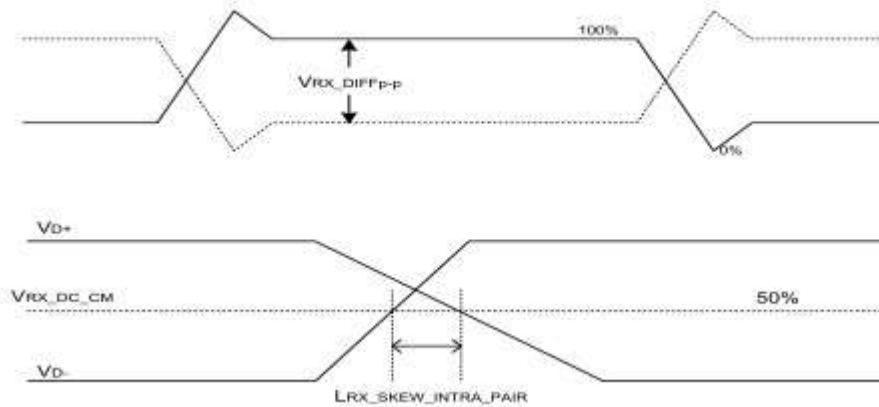

7-3 Input signal,basic display colors and gray scale of each color

Color & Gray Scale		Input Data Signal																							
		Red Data								Green Data								Blue Data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△																								
	▽																								
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	▽	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Gray Scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0		
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0		
	△																								
	▽																								
	Brighter	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0		
	▽	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0		
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0		
Gray Scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
	△																								
	▽																								
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0		
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0		
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1		
Gray Scale of White	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	1		
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1		
	△																								
	▽																								
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0		
	▽	1	1	1	1	1	1	1	0	1	1	1	1	1	1	0	1	1	1	1	1	1	0		
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		

Each basic color can be displayed in 256 gray scales from 8 bit data signals. According to the combination of 24 bit data signals, the 16.7M color display can be achieved on the screen.

8. EDID TBD


9. Optical characteristics

Paramete	Conditions	Min.	Typ.	Max.	Unit	Note	
Viewing Angle (CR>10)	Horizontal	θL	-	85	-	degree	[Note9-1,93,9-4,9-6]
		θR	-	85	-		
	Vertical	θT	-	85	-		
		θB	-	85	-		
Contrast Ratio	Center	800	1000	-	-	[Note9-2,94,10-6]	
Response Time	Tr+Td	-	30	35	ms	[Note9-1,95,9-6]	
CF Color Chromaticity (CIE1931)	Red x	Typ. - 0.03	TBD	Typ. +0.03	-	[Note 9-2,9-6] Normal operation (PWM Duty=100%)	
	Red y		TBD		-		
	Green x		TBD		-		
	Green y		TBD		-		
	Blue x		TBD		-		
	Blue y		TBD		-		
	White x		0.29		-		
	White y		0.33		-		
NTSC ratio	%		(72)		-		
Center Luminance of white	Y _{LI}	200	220		cd/m		
Cross Talk	CT	=0			2	Note9-7	

※The measurement shall be taken 30 minutes after lighting the module at the following rating.

※Condition: PWM Duty = 100%

※The optical characteristics shall be measured in a dark room or equivalent.

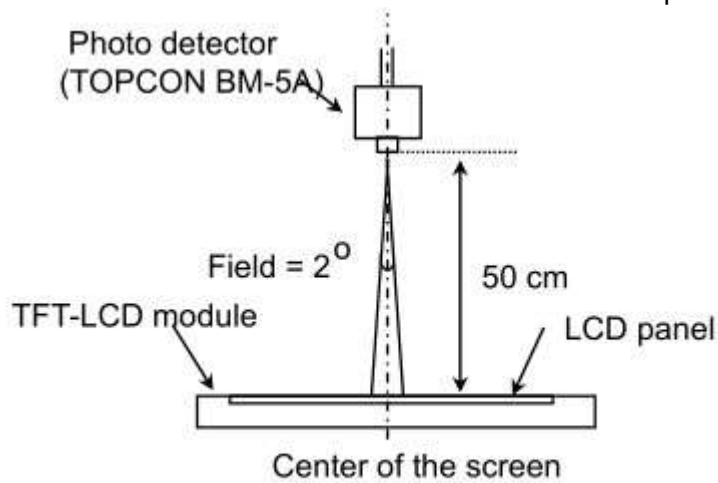

Optical characteristics measurement setup

[Note 9-3]Definitions of viewing angle range

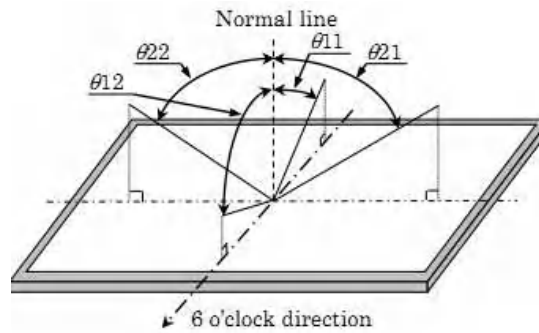


Fig.9-3 Viewing angle

[Note 9-4]Definition of contrast ratio:

The contrast ratio is defined as the following.

$$\text{Contrast Ratio} = \frac{\text{Luminance(Brightness) with all pixels white}}{\text{Luminance(Brightness) with all pixels Black}}$$

[Note 9-5]Definition of response time:

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

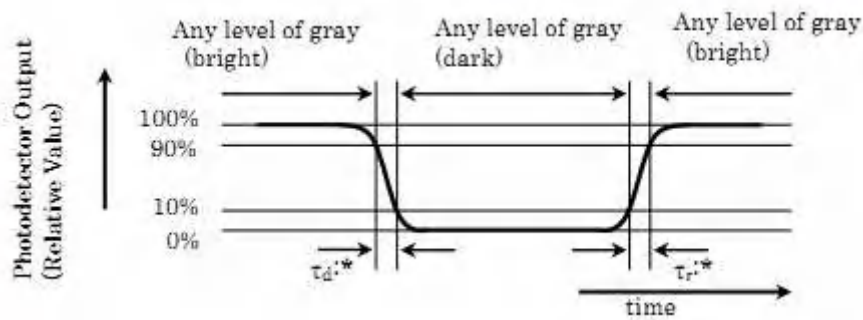


Fig.9-4Responsetime

[Note9-6]This shall be measured at center of the screen.

[Note9-7]Definition of white uniformity :



White uniformity is defined as the

Following with 5 measurements (A~M)

Maximum Luminance of 5 Points (Brightness)

$$\delta w = \frac{\text{Maximum Luminance of 5 Points (Brightness)}}{\text{Minimum Luminance of 5 Points (Brightness)}}$$

[Note9-7]Cross Modulation Test Description

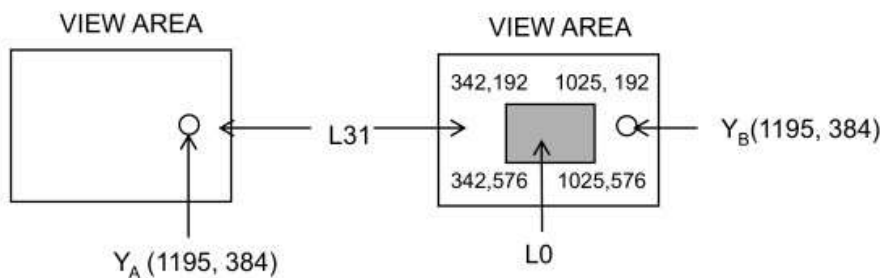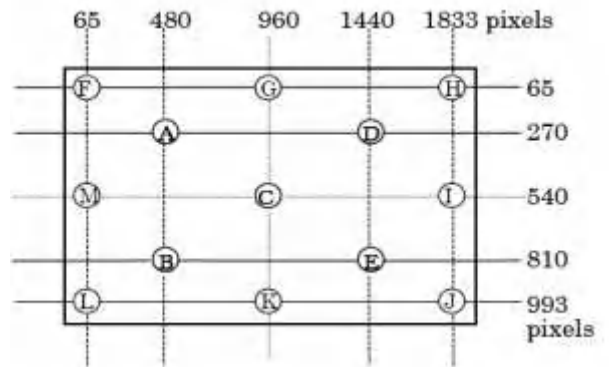

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

Y A = Initial luminance of measured area (cd/m 2)

Y B = Subsequent luminance of measured area (cd/m 2)

The location measured will be exactly the same in both patterns
Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark

10. Display Quality The display quality of the color TFT-LCD module shall be in compliance with the Incoming Inspection Standard.

11. Handling Precautions

(1) Cautions when taking out the module

Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible. As the LCD panel and back - light

element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.

As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.

Do not pull the interface connector in or out while the LCD module is operating.

Put the module display side down on a flat horizontal plane.

Handle connectors and cables with care.

(3) Cautions for the operation

When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.

Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

(4) Cautions for the atmosphere

Dew drop atmosphere should be avoided.

Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics

Do not apply fixed pattern data signal to the LCD module at product aging.

Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

Do not disassemble and/or re-assemble LCD module.

Do not re-adjust variable resistor or switch etc.

When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

12. Packaging Condition(TBD)

Piling number of cartons	
Package quantity in one carton	
Carton size	
Total mass of one carton filled with full modules	
Packing form	

13. Label (TBD)

(1) Module Bar code label:

TBD

(2) Packing bar code label

TBD

14. RoHS Directive

This LCD open-cell is compliant with RoHS Directive.

15. Reliability Test Items

No.	Test Item	Conditions
1	High temperature storage test	Ta=60°C 72h
2	Low temperature storage test	Ta=-10°C 72h
3	High temperature & high humidity operation test	Ta=50°C90%RH 72h (No condensation)
4	High temperature operation test	Ta=50°C 72h
5	Low temperature operation test	Ta=0°C 72h

[Result Evaluation Criteria] Under the display quality test condition with normal operation state.

Do not change these condition as such changes may affect practical display function.

[Normal operation state] temperature: + 15~ + 35°C, Humidity: 45~ 75%, Atmospheric pressure: 86~106kPa

