



A Professional Manufacturer of Display

Manufacturer Certificated



CERT. No.: 282Q19070712006



CERT. No.: 282E19070712007

Product Specification

Model: TOH323XVT-01C

3.23" AMOLED Display Module (262*928)

This module uses RoHS material

Tailor Pixels Technology Co., Ltd.

www.tailorpixels.com

tailor@tailorpixels.com

Ph: 86-755-8821 2653

Table of Contents 目录

1	General Description 规格简介	4
2	Module Parameter 模组参数	4
3	Mechanical Drawings 结构图	5
4	Module Interface 模组接口定义	6
5	Application Circuit 应用电路	6
6	Absolute Maximum Ratings 绝对最大额定值	7
7	Electrical Specification 电性规格	7
8	Initialization Code 初始化代码	8
9	Optical Specifications 光学规格	7
9.1	Optical Specifications 光学规格	
9.2	The power on/off sequence is illustrated below 电源启动/关闭顺序	8
9.3	Definition of Contrast Ratio 对比度的定义	9
9.4	Definition of Viewing Angles 视角的定义	9
9.5	Definition of Color Appearance 色域的定义	9
9.6	Definition of Surface Luminance, Uniformity and Transmittance 表面亮度、均匀性和透光率的定义	10
10	Quality Assurance 质量标准	14
10.1	Purpose 目的	10
10.2	Agreement Items 协议项目	10
10.3	Standard of the Product Visual Inspection 产品外观检验标准	10
10.4	Inspection Specification 检验标准	11
10.5	Classification of Defects 缺陷的分类	15
10.6	Identification/marketing criteria 识别/评分标准	15
10.7	Packing 包装	15
11	Reliability Specification 可靠性规范	15
12	Precautions and Warranty 注意事项和保证	16
12.1	Safety 安全	16
12.2	Handling 处理	16
12.3	Operation 操作	16
12.4	Static Electricity 静电	17
12.5	Limited Warranty 有限质量保证	17
13	Packaging 包装	17
14	Prior Consult Matter 免责声明	17

1 General Description 规格简介

3.23 inch 262x928 is a color active matrix AMOLED oncell module

This module has a 3.23 inch diagonally measured active

area with 262x928 resolutions (262 horizontal by 928 vertical pixel arrays). Each pixel is divided into RED,

GREEN, BLUE dots and this module can display 16.7M colors.

3.23 英寸 262x928 是一个彩色有源矩阵 AMOLED 模块。该模块有一个 3.23 英寸的对角线测量的活动区域，分辨率为 262x928（262 水平和 928 垂直像素数组）。每个像素被分为红色、绿色、蓝点，该模块可以显示 16.7M 的颜色。

2 Module Parameter 模组参数

Features	Details	Unit
Display Size(Diagonal) 显示尺寸(对角线)	3.23	inch
显示屏类型	AMOLED	-
Display Mode 显示模式	Transmissive OLED	-
Resolution 分辨率	262RGB x 928	-
Active Area 显示区	22.008*77.952	mm
Module Outline 模组外形	23.80(H) × 81.05(V) × 0.63(T)	mm
Display Colors 显示颜色	16.7M	-
Interface 接口	MIPI1-lane	-
Driver IC 驱动 IC	Raydium RM690C0	-
TP Viewing Area TP 视窗	/	mm
TP Outline(assembly) TP 外形	/	mm
TP IC	ZT2628	
Luminance on surface 亮度	700	cd/m ²
View Direction 视角方向	All	Best image
Contrast ratio 对比度	100000:1	
Color gamut 色域	100%	
PPI 图像点密集度	302	-
Window effect 视窗效果	-	-
Cover plate surface effect 盖板表面效果	-	-
Operating Temperature 工作温度	-20~70	°C
Storage Temperature 储存温度	-30~80	°C
Weight 重量	TBD	g

Note 1: Excluding hooks, posts , FPC/FPC tail etc.

3 Mechanical Drawings 结构图

4 Module Interface 模组接口定义

NO	SYMBOL	FUNCTION
1	GND	Power Ground
2	GND	Power Ground
3	LCM_CLKN	MIPI strobe negative signal
4	VCI_EN	Active high enable input pin for VCI
5	LCM_CLKP	MIPI strobe positive signal
6	GND	Power Ground
7	GND	Power Ground
8	LCD_IO(1.8V)	DIC Logic 1.8V
9	LCM_D1N	NC
10	GND	Power Ground
11	LCM_D1P	NC
12	LCD_RST	OLED Device reset signal (0 : enable ; 1 : Disable)
13	GND	Power Ground
14	LCM_ID	ID
15	LCD_D0N	MIPI data 1 negative signal
16	GND	Power Ground
17	LCM_D0P	MIPI data 1 positive signal
18	VCC_CTP	TP Power 2.8V
19	GND	Power Ground
20	GND	Power Ground
21	LCM_TE	Synchronous signal output from panel to avoid tearing effect
22	GND	Power Ground
23	VPP	MTP OLED
24	GTP_INT	TP INT signal
25	GND	Power Ground
26	TP_TWI2_SDA	TP I ² C data
27	VBAT	PMIC input power
28	TP_TWI2_SDA	TP I ² C data
29	VBAT	PMIC input power
30	GND	Power Ground

5.3 Application Circuit 应用电路 ()

6 Absolute Maximum Ratings 绝对最大额定值

VSS=0V, Ta=25°C

Note 1: 90%RH max, If Ta is below 50°C; 60%RH max, If Ta is over 60°C.

Item 项目	Symbol	Min.最小	Max.最大	Unit 单位	
Supply Voltage 电源电压	Power supply 电力供应	VDD	-0.3	+4.6	V
	Analog 模拟	-	-	-	V
	IO	IOVDD	-0.3	+5.5	V
Input Voltage 输入电压	V_i	-0.3	IOVDD+0.3	V	
Storage temperature 储存温度	T_{stg}	-30	+70	°C	
Operating temperature 工作温度	T_{op}	-20	+60	°C	
Storage humidity 存储湿度	H_{stg}	10	Note 1	%RH	
Operating humidity 操作湿度	H_{op}	10	Note 1	%RH	

7 Electrical Specification 电性规格

DC Characteristics 直流特性

Item 项目	Symbol	Min.最小	Typ.中间	Max.最大	Unit 单位	
Supply Voltage 电源电压	Powersupply 电力供应	VDD	2.4	2.8	3.3	V
	Analog	VCI	2.4	2.8	3.3	V
	IO	IOVDD	1.65	2.8/3.3	3.3	V
Logic Low input voltage 输入电压低	V_{IL}	-0.3IOVDD	-	0.3IOVDD	V	
Logic High input voltage 输入电压高	V_{IH}	0.7IOVDD	-	IOVDD	V	
Logic Low output voltage 输出电压低	V_{OL}	-	-	0.2IOVDD	V	
Logic High output voltage 输出电压高	V_{OH}	0.8IOVDD	-	-	V	
Current Consumption 电流消耗	Normal display 正常的显示	Ivdd	-	30	-	mA
	Standby mode 待机模式	Ivdd	-	60	-	uA
Frame Frequency 帧频	f_{FR}	-	60	-	Hz	

8 Initialization Code 初始化代码

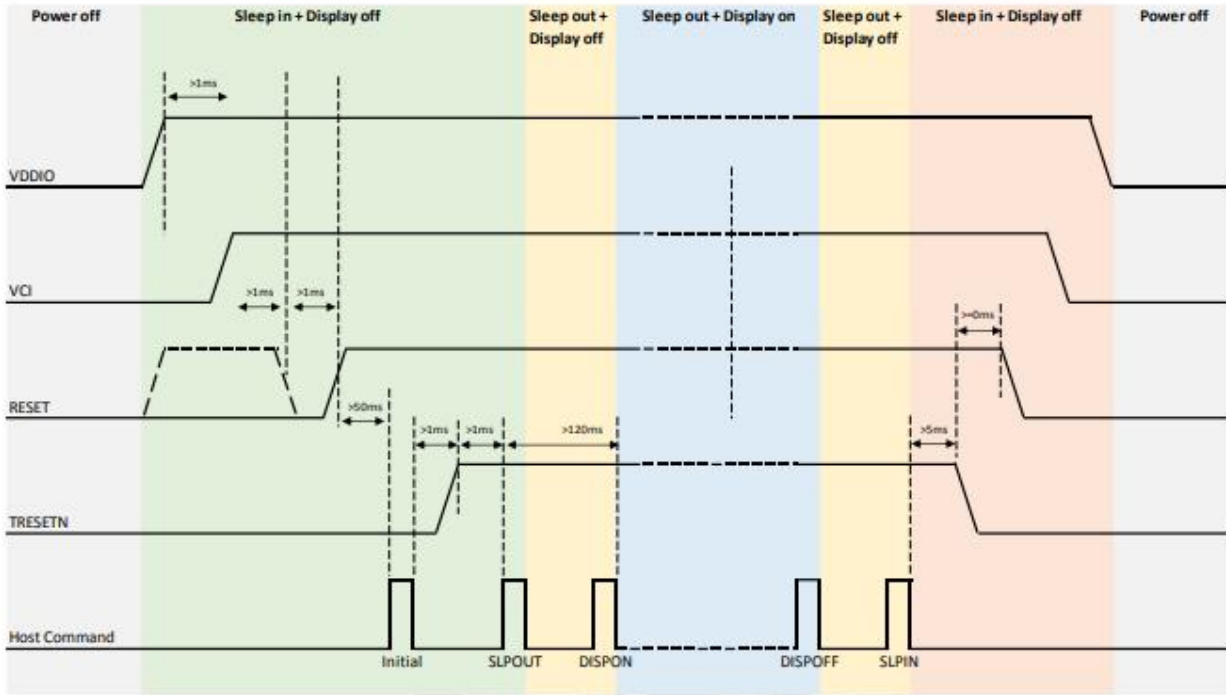
9 Optical Specifications 光学规格

9.1 Optical Specifications 光学规格

Ta=25°C, VDD=2.8V, TN LC+ Polarizer

Item 项目	Symbol 标志	Condition 条件	Specification 规范			Unit 单位	
			Min. 最小	Typ. 中间	Max. 最大		
Luminance on surface 表面亮度	L_v	Normally viewing angle $\theta_x = \theta_y = 0^\circ$		700	-	cd/m ²	
Contrast ratio 对比度	CR		100000	-	-	-	
Response time 响应时间	TR	-	-	10	15	ms	
	TF		-	20	20		
Chromaticity Transmissive 色度	Red 红	XR	-	0.636	0.666	0.690	-
		YR		0.303	0.333	0.363	-
	Green 绿	XG		0.186	0.226	0.266	-
		YG		0.679	0.719	0.759	-
	Blue 蓝	XB		0.118	0.138	0.158	-
		YB		0.035	0.055	0.075	-
	White 白	XW		0.280	0.300	0.320	-
		YW		0.290	0.310	0.330	-
Viewing Angle 视角	Horizo ntal	$\theta X+$	Center $CR \geq 10$	75	85	-	Deg.
		$\theta X-$		75	85	-	
	Vertical	$\theta Y+$		75	85	-	
		$\theta Y-$		75	85	-	
NTSC Ratio(Gamut)		-	-	95	100	-	%

9.2 The power on/off sequence is illustrated below 电源启动/关闭顺序




9.3 Definition of Contrast Ratio 对比度的定义

Contrast is measured perpendicular to display surface in reflective and transmissive mode. The measurement condition is:

Measuring Equipment 测量设备	BM-7 or EQUI
Measuring Point Diameter 测点直径	3mm//1mm
Measuring Point Location 测点位置	Active Area centre point
Test pattern 测试模式	A: All Pixels white
	B: All Pixel black
Contrast setting	Maximum

Definitions: CR (Contrast) = Luminance of White Pixel / Luminance of Black Pixel

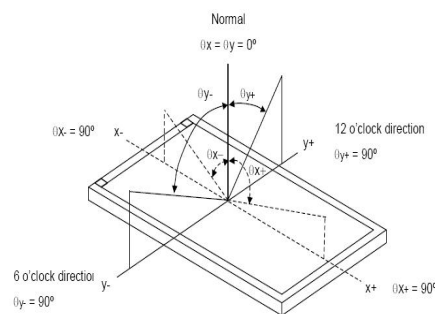9.4 Definition of Viewing Angles 视角的定义




Measuring machine: LCD-5100 or EQUI

9.5 Definition of Color Appearance 色域的定义

R,G,B and W are defined by (x, y) on the IE chromaticity diagram

NTSC=area of RGB triangle/area of NTSC triangleX100%

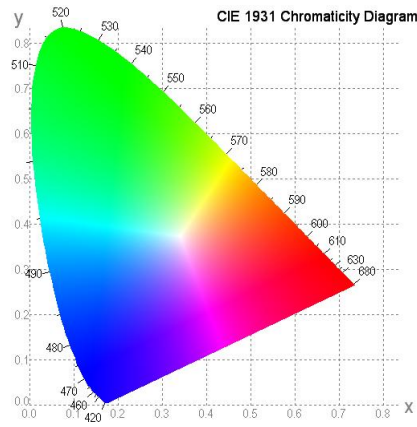Measuring picture: Red, Green, Blue and White (Measuring machine: BM-7)



9.6 Definition of Surface Luminance, Uniformity and Transmittance

表面亮度、均匀性和透光率的定义

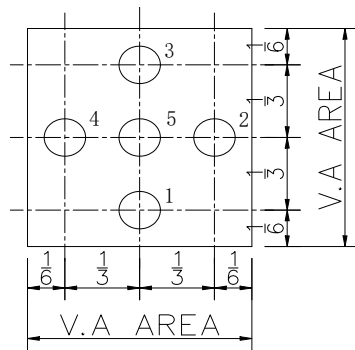
Using the transmissive mode measurement approach, measure the white screen luminance of the display panel and backlight.

9.6.1 Surface Luminance: $LV = \text{average (LP1:LP5)}$

9.6.2 Uniformity = $\text{Minimal (LP1:LP5) / Maximal (LP1:LP5) * 100\%}$

9.6.3 Transmittance = $LV \text{ on LCD} / LV \text{ on Backlight} * 100\%$

Note :Measuring machine:BM-7



10 Quality Assurance 质量标准

10.1 Purpose 目的

This standard for Quality Assurance assures the quality of LCD module products supplied to customer by Tailorpixels .

10.2 Agreement Items 协议项目

Tailorpixels and customer shall negotiate if the following situation occurs:

10.2.1 Discrepancies between Tailorpixels 's QA standards and customer's QA standards.

10.2.2 Additional requirement to be added in product specification.

10.2.3 Any other special problem.

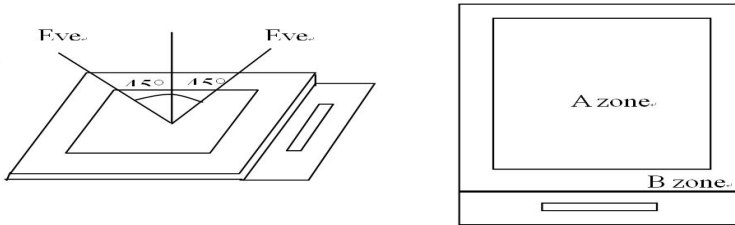
10.3 Standard of the Product Visual Inspection 产品外观检验标准

10.3.1 Appearance inspection:

10.3.1.1 The inspection must be under illumination about 1000 – 1500 lx, and the distance of view must be at 30cm ± 2cm.

10.3.1.2 The viewing angle should be 45° from the vertical line without reflection light or follows customer's viewing angle specifications.

10.3.1.3 Definition of area: A Zone: Active Area, B Zone: Viewing Area.






10.3.2 Basic principle: A set of sample to indicate the limit of acceptable quality level must be discussed by both Tailorpixels and customer when there is any dispute happened.




10.4 Inspection Specification 检验标准






Sampling plan according to GB/T2828.1-2012/ISO 2859-1: 1999 and ANSI/ASQC Z1.4-1993, normal level 2 and based on:

Major defect: AQL 0.4

Minor defect: AQL 1.0

No.	Item 项目	Criteria (Unit: mm) 标准															
01	Black / White spot Foreign material (Round type) Pinholes Stain Particles inside cell. (Minor defect) 黑/白斑/异物 (圆类型)细胞内的针孔染色颗粒。(小瑕疵)	 <table border="1" data-bbox="949 1131 1428 1534"> <thead> <tr> <th>Size</th> <th>Area</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$\phi \leq 0.10$</td> <td></td> <td>Ignore</td> </tr> <tr> <td>$0.10 < \phi \leq 0.2$</td> <td></td> <td>2</td> </tr> <tr> <td>$0.2 < \phi$</td> <td></td> <td>0</td> </tr> <tr> <td>Total</td> <td></td> <td>$N \leq 3$ NO include $\phi \leq 0.10$</td> </tr> </tbody> </table> <p>$\phi = (a + b) / 2$ Distance between 2 defects should more than 10mm apart.</p>	Size	Area	Acc. Qty	$\phi \leq 0.10$		Ignore	$0.10 < \phi \leq 0.2$		2	$0.2 < \phi$		0	Total		$N \leq 3$ NO include $\phi \leq 0.10$
Size	Area	Acc. Qty															
$\phi \leq 0.10$		Ignore															
$0.10 < \phi \leq 0.2$		2															
$0.2 < \phi$		0															
Total		$N \leq 3$ NO include $\phi \leq 0.10$															
02	Black and White line Scratch Foreign material (Line type) (Minor defect) 黑白线刮伤异物(类型)行 (小瑕疵)	 															

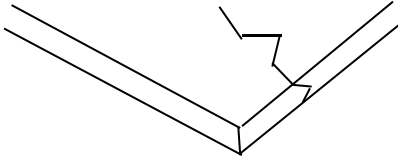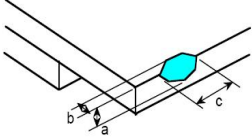No.	Item 项目	Criteria (Unit: mm) 标准															
		<table border="1" data-bbox="635 174 1259 465"> <thead> <tr> <th>Length</th> <th>Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>/</td> <td>$W \leq 0.03$</td> <td>Ignore</td> </tr> <tr> <td>$L \leq 3$</td> <td>$0.05 < W \leq 0.08$</td> <td>2</td> </tr> <tr> <td>/</td> <td>$0.08 < W$</td> <td>0</td> </tr> <tr> <td colspan="2">Total</td> <td>$N \leq 2$</td> </tr> </tbody> </table> <p data-bbox="587 474 1342 607">Distance between 2 defects should more than 10mm apart. Scratches not viewable through the back of the display are acceptable.</p>	Length	Width	Acc. Qty	/	$W \leq 0.03$	Ignore	$L \leq 3$	$0.05 < W \leq 0.08$	2	/	$0.08 < W$	0	Total		$N \leq 2$
Length	Width	Acc. Qty															
/	$W \leq 0.03$	Ignore															
$L \leq 3$	$0.05 < W \leq 0.08$	2															
/	$0.08 < W$	0															
Total		$N \leq 2$															
03	<p data-bbox="258 750 560 882">Glass Crack (Minor defect) 玻璃裂纹(小瑕疵)</p>	 <p data-bbox="587 869 1430 1001">LCD with extensible crack line is unacceptable(When press the cracked LCD area, the line will expand, we define it is extensible crack line)</p>															
04	<p data-bbox="258 1016 539 1198">Glass Chipping Pad Area: (Minor defect) 玻璃碎片面积:(轻微缺陷)</p> 	<table border="1" data-bbox="775 1090 1246 1191"> <thead> <tr> <th>Length and Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$c < 5.0, b < 0.4$</td> <td>Ignore</td> </tr> </tbody> </table>	Length and Width	Acc. Qty	$c < 5.0, b < 0.4$	Ignore											
Length and Width	Acc. Qty																
$c < 5.0, b < 0.4$	Ignore																
05	<p data-bbox="258 1462 552 1693">Glass Chipping Rear of Pad Area:(Minor defect)) 玻璃切屑垫区后方: (小瑕疵)</p> 	<table border="1" data-bbox="775 1485 1246 1738"> <thead> <tr> <th>Length and Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$c > 3.0, b < 1.0$</td> <td>1</td> </tr> <tr> <td>$c < 3.0, b < 1.0$</td> <td>2</td> </tr> <tr> <td>$c < 3.0, b < 0.5$</td> <td>4</td> </tr> <tr> <td colspan="2">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table>	Length and Width	Acc. Qty	$c > 3.0, b < 1.0$	1	$c < 3.0, b < 1.0$	2	$c < 3.0, b < 0.5$	4	$a < \text{Glass Thickness}$						
Length and Width	Acc. Qty																
$c > 3.0, b < 1.0$	1																
$c < 3.0, b < 1.0$	2																
$c < 3.0, b < 0.5$	4																
$a < \text{Glass Thickness}$																	

No.	Item 项目	Criteria (Unit: mm) 标准								
06	Glass Chipping Except Pad Area: (Minor defect) 除垫区外的玻璃切屑:(小瑕疵) 	<table border="1" data-bbox="775 248 1246 405"> <thead> <tr> <th>Length and Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$c \leq 0.6, b < 5.0$</td> <td>Ignore</td> </tr> <tr> <td colspan="2" style="text-align: center;">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table>	Length and Width	Acc. Qty	$c \leq 0.6, b < 5.0$	Ignore	$a < \text{Glass Thickness}$			
Length and Width	Acc. Qty									
$c \leq 0.6, b < 5.0$	Ignore									
$a < \text{Glass Thickness}$										
07	Glass Corner Chipping: (Minor defect) 玻璃切角:(小瑕疵) 	<table border="1" data-bbox="775 645 1246 846"> <thead> <tr> <th>Length and Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$c < 2.0, b < 1.5$</td> <td>Ignore</td> </tr> <tr> <td>$c < 1.5, b < 2$</td> <td>Ignore</td> </tr> <tr> <td colspan="2" style="text-align: center;">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table>	Length and Width	Acc. Qty	$c < 2.0, b < 1.5$	Ignore	$c < 1.5, b < 2$	Ignore	$a < \text{Glass Thickness}$	
Length and Width	Acc. Qty									
$c < 2.0, b < 1.5$	Ignore									
$c < 1.5, b < 2$	Ignore									
$a < \text{Glass Thickness}$										
08	Glass Burr: (Minor defect) 玻璃磨:(小瑕疵) 	Glass burr don't affect assemble and module dimension. <table border="1" data-bbox="775 1093 1246 1193"> <thead> <tr> <th>Length</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$F < 0.5$</td> <td>Ignore</td> </tr> </tbody> </table>	Length	Acc. Qty	$F < 0.5$	Ignore				
Length	Acc. Qty									
$F < 0.5$	Ignore									
09	FPC Defect: (Minor defect) FPC 缺陷:(小瑕疵) 	9.1 Dent, pinhole width $a < w/3$. (w: circuitry width.) 9.2 Open circuit is unacceptable. 9.3 No oxidation, contamination and distortion.								
10	Screen deformation 屏幕上的变形 	Test for insertion of plug gauge at highest warping point: (3.1-6.0inches) $H \leq 0.3\text{MM}$ The client has special requirements, according to drawing								

No.	Item 项目	Criteria (Unit: mm) 标准										
11	Bubble on Polarizer (Minor defect) 偏光片上的气泡(小瑕疵)	<table border="1"> <thead> <tr> <th data-bbox="775 185 1058 237">Diameter</th> <th data-bbox="1058 185 1244 237">Acc. Qty</th> </tr> </thead> <tbody> <tr> <td data-bbox="775 237 1058 288">$\varphi \leq 0.15$</td> <td data-bbox="1058 237 1244 288">Ignore</td> </tr> <tr> <td data-bbox="775 288 1058 340">$0.15 < \varphi \leq 0.25$</td> <td data-bbox="1058 288 1244 340">2</td> </tr> <tr> <td data-bbox="775 340 1058 392">$0.25 < \varphi \leq 0.3$</td> <td data-bbox="1058 340 1244 392">1</td> </tr> <tr> <td data-bbox="775 392 1058 443">$0.3 < \varphi$</td> <td data-bbox="1058 392 1244 443">0</td> </tr> </tbody> </table>	Diameter	Acc. Qty	$\varphi \leq 0.15$	Ignore	$0.15 < \varphi \leq 0.25$	2	$0.25 < \varphi \leq 0.3$	1	$0.3 < \varphi$	0
Diameter	Acc. Qty											
$\varphi \leq 0.15$	Ignore											
$0.15 < \varphi \leq 0.25$	2											
$0.25 < \varphi \leq 0.3$	1											
$0.3 < \varphi$	0											
12	Dent on Polarizer (Minor defect) 偏光片上的凹痕(小瑕疵)	<table border="1"> <thead> <tr> <th data-bbox="775 454 1058 506">Diameter</th> <th data-bbox="1058 454 1244 506">Acc. Qty</th> </tr> </thead> <tbody> <tr> <td data-bbox="775 506 1058 557">$\varphi \leq 0.15$</td> <td data-bbox="1058 506 1244 557">Ignore</td> </tr> <tr> <td data-bbox="775 557 1058 609">$0.15 < \varphi \leq 0.25$</td> <td data-bbox="1058 557 1244 609">2</td> </tr> <tr> <td data-bbox="775 609 1058 660">$0.25 < \varphi \leq 0.30$</td> <td data-bbox="1058 609 1244 660">1</td> </tr> <tr> <td data-bbox="775 660 1058 712">$0.3 < \varphi$</td> <td data-bbox="1058 660 1244 712">0</td> </tr> </tbody> </table>	Diameter	Acc. Qty	$\varphi \leq 0.15$	Ignore	$0.15 < \varphi \leq 0.25$	2	$0.25 < \varphi \leq 0.30$	1	$0.3 < \varphi$	0
Diameter	Acc. Qty											
$\varphi \leq 0.15$	Ignore											
$0.15 < \varphi \leq 0.25$	2											
$0.25 < \varphi \leq 0.30$	1											
$0.3 < \varphi$	0											
13	Bezel 边框	13.1 No rust, distortion on the Bezel.										
14	Touch Panel 触控面板	D: Diameter W: width L: length 14.1 Spot: $D \leq 0.20$ is acceptable $0.20 < D \leq 0.3$, acceptable QTY, 3 $D > 0.3$ is unacceptable 14.2 Dent (dot): $D \leq 0.20$ is acceptable $0.20 < D \leq 0.3$, acceptable QTY, 3 $D > 0.30$ is unacceptable 2dots are acceptable and the distance between defects should more than 10 mm. Dent (line) According to the limit sample 14.3 Scratch: $W \leq 0.03$, $L \leq 10$ is acceptable, $0.03 < W \leq 0.10$, $L \leq 10$, acceptable QTY, 3 $W > 0.10$ is unacceptable. Distance between 2 defects should more than 10 mm.										
15	PCB	15.1 No distortion or contamination on PCB terminals. 15.2 All components on PCB must same as documented on the BOM/component layout. 15.3 Follow IPC-A-600F.										
16	Soldering 焊接	Follow IPC-A-610C standard										

No.	Item 项目	Criteria (Unit: mm) 标准
17	Electrical Defect (Major defect) 电气 缺陷(主要缺陷)	The below defects must be rejected. 17.1 Missing vertical / horizontal segment, 17.2 Abnormal Display. 17.3 No function or no display. 17.4 Current exceeds product specifications. 17.5 LCD viewing angle defect. 17.6 No Backlight. 17.7 Dark Backlight. 17.8 Touch Panel no function. 17.9 Dark Dot –one Allowed. 17.10 Bright Dot – one Allowed. Remark: 1. A pixel defect is acceptable if one color is none functional and causes a bright dot. The display may have one case where one color is out and cause a dark dot. 2. Bright dot caused by scratch and foreign object accords to item1.
18	Light leak 漏光	Yellow light OK; White light,According to the limit sample

Remark: Visual and cosmetic defects are rejectable only if these fall within the LCD viewing area.

10.5 Classification of Defects 缺陷的分类

Visual defects (Except no / wrong label) are treated as minor defect and electrical defect is major.

10.6 Identification/marketing criteria 识别/评分标准

Any unit with illegible / wrong /double or no marking/ label shall be rejected.

10.7 Packing 包装

10.7.1 There should be no damage of the outside carton box, each packaging box should has label in the correct location per packing drawing requirement.

10.7.2 All direct package materials shall offer ESD protection.

11 Reliability Specification 可靠性规范

Item 项目	Condition 条件	Cycle Time 周期时间	Quantity 数量	Remark 备注
Constant Temp. and Constant Humidity Operation Test 恒温恒湿运行试验	+40 ± 3°C,90 ± 3%RH	96hrs	--	*1
High Temp. Operation Test 高温操作试验	+70 ± 3°C	96hrs	--	
Low Temp. Operation Test 低温操作试验	-20 ± 3°C	96hrs	--	
Thermal Shock Test 热冲击试验	-20 ± 3°C (30min)	10cycles	--	

	+70 ± 3°C (30min)			
ESD Test(end product) ESD 测试 (最终产品)	150pF, 330Ω, ±2KV, Contact	10times	--	*2, *3
	150pF, 330Ω, ±6KV, Air			
Vibration Test(for packaging) 振动 测试(包装)	Frequency: 10Hz to 55Hz to 10Hz, Swing: 1.5mm, time: X, Y, Z each 2H.	6hrs	One inner carton	*4

Note 1. For humidity test, DI water should be used.

Inspection Standard: Inspect after 1-2hrs storage at room temperature, the sample shall be free from the following defects:

- Air bubble in the LCD
- Seal Leakage
- Non-display
- Missing Segment
- Glass Crack
- IDD is greater than twice initial value.
- Others as per QA Inspection Criteria

Note 2. No defect is allowed after testing

The End Product ESD value is only indicative and depends on customer ESD protection design for the whole system.

Note 3. ESD should be applied to LCD glass panel, not other areas (such as on IC and so on) IDD should be within twice initial value.

In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.

Note 4. Only upon request.

12 Precautions and Warranty 注意事项和保证

12.1 Safety 安全

12.1.1 The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

12.1.2 Since the liquid crystal cells are made of glass, do not apply strong impact on them.

Handle with care.

12.2 Handling 处理

12.2.1 Reverse and use within ratings in order to keep performance and prevent damage.

12.2.2 Do not wipe the polarizer with dry cloth, as it might cause scratch. If the surface of the LCD needs to be cleaned, wipe it swiftly with cotton or other soft cloth soaked with petroleum IPA, do not use other chemicals.

12.3 Operation 操作

12.3.1 Do not drive LCD with DC voltage

12.3.2 Response time will increase below lower temperature

12.3.3 Display may change color with different temperature

12.3.4 Mechanical disturbance during operation, such as pressing on the display area, may

cause the segments to appear “fractured”.

12.4 Static Electricity 静电

12.4.1 CMOS LSIs are equipped in this unit, so care must be taken to avoid the electro-static charge, by ground human body, etc.

12.4.2 The normal static prevention measures should be observed for work clothes and benches.

12.4.3 The module should be kept into anti-static bags or other containers resistant to static for storage.

12.5 Limited Warranty 有限质量保证

12.5.1 Unless otherwise agreed between Tailorpixels and customer, Tailorpixels will replace or repair any of its LCD and LCM which Tailorpixels found to be defective electrically and visually when inspected in accordance with Tailorpixels Quality Standards, for a period of one year from date of shipment.

12.5.2 The warranty liability of Tailorpixels is limited to repair and/or replacement. Tailorpixels will not be responsible for any consequential loss.

12.5.3 If possible, we suggest you use up all modules in six months. If the module storage time over twelve months, we suggest that recheck it before the module be used.

13 Packaging 包装

TBD

14 Prior Consult Matter 免责声明

1. For Tailorpixels standard products, we keep the right to change material, process for improving the product property without prior notice to our customer.

2. For OEM products, if any changes are needed which may affect the product property, we will consult with our customer in advance.

3. If you have special requirement about reliability condition, please let us know before you start the test on our samples.

Reference 参考

Item 项目	Description 描述	Revision 修订
Raydium RM690C0	IC Data sheet	V0
Panel 3.23 寸 262X928	LCM assembly drawing	V0