



A Professional Manufacturer of Display

Manufacturer Certificated



CERT. No.: 282Q19070712006



CERT. No.: 282E19070712007

Product Specification

Model: TTH397BVS-01

3.97" TFT Display Module (480*800)

This module uses RoHS material

Tailor Pixels Technology Co., Ltd.

www.tailorpixels.com

tailor@tailorpixels.com

Ph: 86-755-8821 2653

Table of Contents 目录

1	General Description 规格简介	4
2	Module Parameter 模组参数	4
3	Mechanical Drawings 结构图	5
4	Module Interface 模组接口定义	6
5	Application Circuit 应用电路	6
6	Absolute Maximum Ratings 绝对最大额定值	7
7	Electrical Specification 电性规格	7
8	Initialization Code 初始化代码	8
9	Optical Specifications 光学规格	8
9.1	Optical Specifications 光学规格	8
9.2	The power on/off sequence is illustrated below 电源启动/关闭顺序如下所示	9
9.3	Definition of Contrast Ratio 对比度的定义	10
9.4	Definition of Viewing Angles 视角的定义	10
9.5	Definition of Color Appearance 色域的定义	10
9.6	Definition of Surface Luminance, Uniformity and Transmittance 表面亮度、均匀性和透光率的定义	11
10	Quality Assurance 质量标准	11
10.1	Purpose 目的	11
10.2	Agreement Items 协议项目	12
10.3	Standard of the Product Visual Inspection 产品外观检验标准	12
10.4	Inspection Specification 检验标准	12
10.5	Classification of Defects 缺陷的分类	17
10.6	Identification/marketing criteria 识别/评分标准	17
10.7	Packing 包装	17
11	Reliability Specification 可靠性规范	18
12	Precautions and Warranty 注意事项和保证	19
12.1	Safety 安全	19
12.2	Handling 处理	19
12.3	Operation 操作	19
12.4	Static Electricity 静电	19
12.5	Limited Warranty 有限质量保证	19
13	Packaging 包装	19
14	Prior Consult Matter 免责声明	20

1 General Description 规格简介

This display module is a trans-reflective type color active matrix TFT(Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This module is composed of a TFT LCD module, a driver circuit, and a back-light unit. The resolution of a 3.97" contains 480RGB x 800 dots and can display up to 16.7M colors.

该显示模块是一种采用非晶硅 TFT 作为开关器件的半透半反型彩色有源矩阵 TFT(薄膜晶体管)液晶显示器。该模块由 TFT 液晶显示模块、驱动电路和背光单元组成。3.99 英寸的分辨率包含 480RGB x 800 点，可显示高达 16.7M 的颜色。


本款显示屏采用 90%反 10%显示原理，在阳光直射下清晰可见，工作电流并不大；同时本款显示屏在有环境光的情况下，可以不开背光显示，此工作条件下只有显示部分有功耗，背光部分无功耗，故而大大增加产品续航时间，并有效克服发热问题。

2 Module Parameter 模组参数

Features	Details	Unit
Display Size(Diagonal) 显示尺寸(对角线)	3.97	inch
LCD type 液晶显示屏类型	α -Si TFT	-
Display Mode 显示模式	Normally White	-
Resolution 分辨率	480RGB x 800	-
Active Area 显示区	51.84(H) \times 86.4(V)	mm
Module Outline 模组外形	55.44(H) \times 96.17(V) \times 2.05(T)	mm
Display Colors 显示颜色	16.7M	-
Interface 接口	MIPI	-
Driver IC 驱动 IC	ST7701	-
TP Viewing Area TP 视窗	无	mm
TP Outline(assembly) TP 外形	无	mm
Luminance on surface 亮度	150	cd/m ²
View Direction 视角方向	6 点钟方向	Best image
Contrast Ratio 对比度 (Transmissive 透光)	60:1	
Contrast Ratio 对比度 (Reflective 反光)	11:1	
Gamut 色域 (Transmissive 透光)	34%	
Gamut 色域 (Reflective 反光)	5.73%	
PPI 图像点密集度	166	
Window effect 视窗效果	-	-
Cover plate surface effect 盖板表面效果	-	-
Operating Temperature 工作温度	-20~70	°C
Storage Temperature 储存温度	-30~80	°C
Weight 重量	TBD	g

Note 1: Excluding hooks, posts , FPC/FPC tail etc.

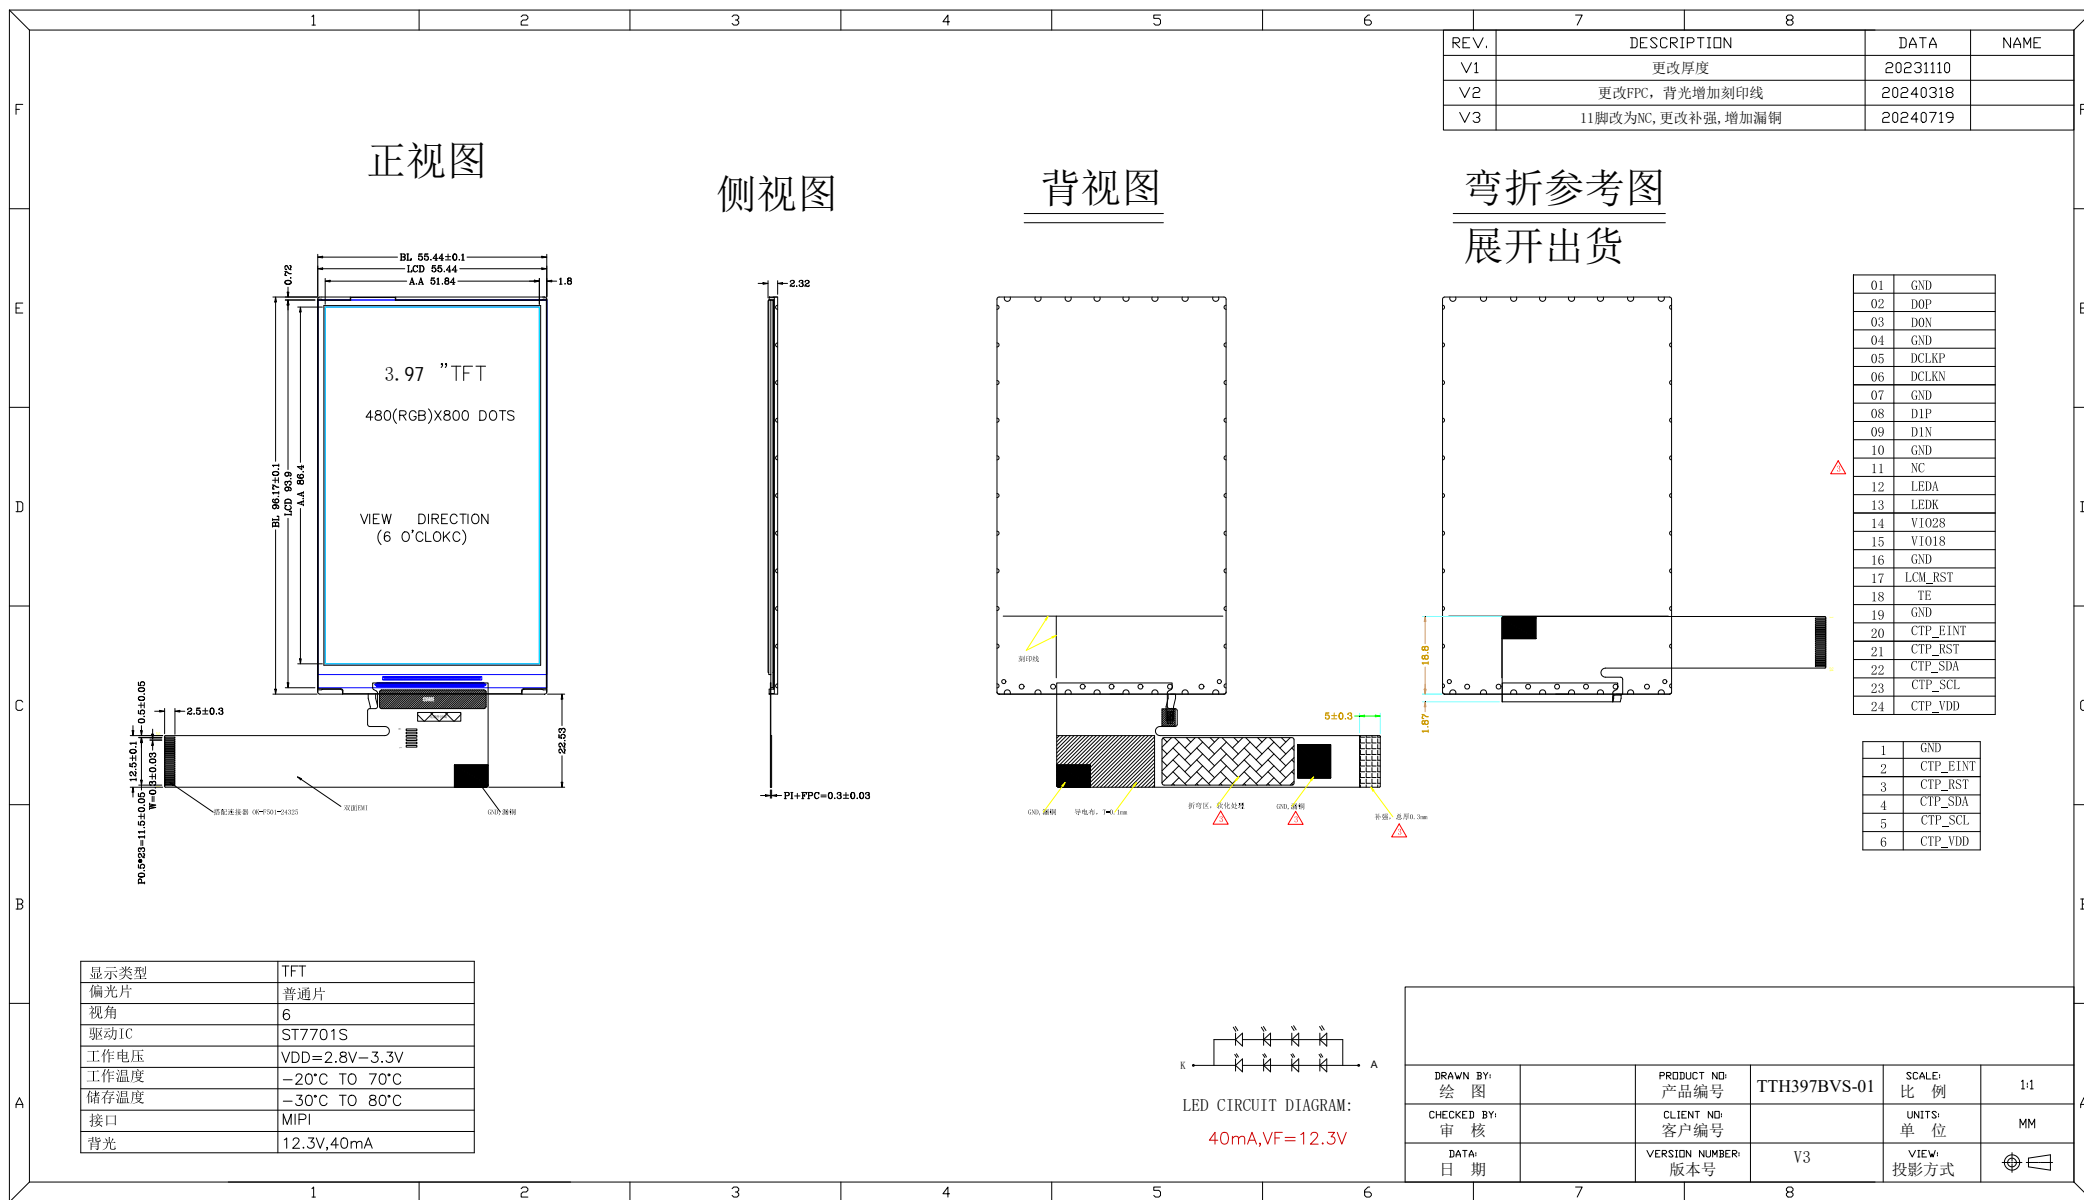3 Mechanical Drawings



4 Module Interface 模组接口定义

NO	SYMBOL	FUNCTION
1	GND	Power groun
2	D0P	MIPI DSI differential data pair. (Data lane 0 positive polarity)
3	D0N	MIPI DSI differential data pair. (Data lane 0 negative polarity)
4	GND	Power groun
5	DCLKP	CLKP
6	DCLKN	CLKN
7	GND	Power groun
8	D1P	MIPI DSI differential data pair. (Data lane 1 positive polarity)
9	D1N	MIPI DSI differential data pair. (Data lane 1 negative polarity)
10	GND	Power groun
11	NC	OPEN
12	LEDA	LED Anode
13	LEDK	LED Cathode
14	VIO28	Power Supply for Analog, VDD=2.8V~3.3V
15	VIO18	Power Supply for I/O system. VDDIO=1.8V~3.3V
16	GND	Power groun
17	LCM_RST	This signal will reset the device and it must be applied to properly initialize the chip. Signal is active low
18	TE	Tearing effect output pin to synchronize MCU to frame writing. This pin is low when it is not activated. If not used, please open it.
19	GND	Power groun
20	CTP_EINT	Touch panel interrupt output.If not used, please open it.
21	CTP_RST	Touch panel rese.If not used, please open it.
22	CTP_SDA	Touch panel I2C data.If not used, please open it.
23	CTP_SCL	Touch panel I2C clock..If not used, please open it.
24	CTP_VDD	Touch panel Power Supply for Analog.If not used, please open it.


5 Application Circuit 应用电路

5.1 Backlight recommended circuit 背光电路参考

Motherboard driver backlight is need constant current circuit, if the rated voltage screen after light brightness difference.Current and power consumption of the machine are inconsistent, so recommend a backlight driving circuit is best rated current.It is recommended to use IC (AW9364). The reference circuit is as follows:

5.2 Backlight recommended circuit 背光电路参数推荐

Motherboard driver backlight is need constant current circuit:



LED CIRCUIT DIAGRAM:

40mA, VF=12.3V

8 灯并联

Note: constant current circuit for every LED, and though LED lamp current is less than 20mA. Recommend between 15mA and 20 mA for every LED.

5.3 Application Circuit 应用电路 ()

6 Absolute Maximum Ratings 绝对最大额定值

VSS=0V, Ta=25°C

Item 项目	Symbol	Min.最小	Max.最大	Unit 单位	
Supply Voltage 电源电压	Power supply 电力供应	VDD	-0.3	+4.6	V
	Analog 模拟	-	-	-	V
	IO	IOVDD	-0.3	+4.6	V
Input Voltage 输入电压	Vi	-0.3	IOVDD+0.3	V	
Storage temperature 储存温度	T _{stg}	-30	+80	°C	
Operating temperature 工作温度	T _{op}	-20	+70	°C	
Storage humidity 存储湿度	H _{stg}	10	Note 1	%RH	
Operating humidity 操作湿度	H _{op}	10	Note 1	%RH	


Note 1: 90%RH max, If Ta is below 50°C; 60%RH max, If Ta is over 60°C.

7 Electrical Specification 电性规格

DC Characteristics 直流特性

Item 项目		Symbol	Min.最小	Typ.中间	Max.最大	Unit 单位
Supply Voltage 电源电压	Powersupply 电力供应	VDD	2.4	2.8	3.3	V
	Analog	VCI	2.4	2.8	3.3	V
	IO	IOVDD	1.65	1.8/2.8	3.3	V
Logic Low input voltage 输入电压低		V _{IL}	-0.3IOVDD	-	0.3IOVDD	V
Logic High input voltage 输入电压高		V _{IH}	0.7IOVDD	-	IOVDD	V
Logic Low output voltage 输出电压低		V _{OL}	-	-	0.2IOVDD	V
Logic High output voltage 输出电压高		V _{OH}	0.8IOVDD	-	-	V
Current Consumption 电 流消耗	Normal display 正常的显示	Ivdd	-	12	-	mA
	Standby mode 待机模式	Ivdd	-	40	-	uA
Frame Frequency 帧频		f _{FR}	-	40	-	Hz
不打开 BL 功耗		-	0.019	-	-	W
打开 BL 功耗		-	0.492	-	-	W

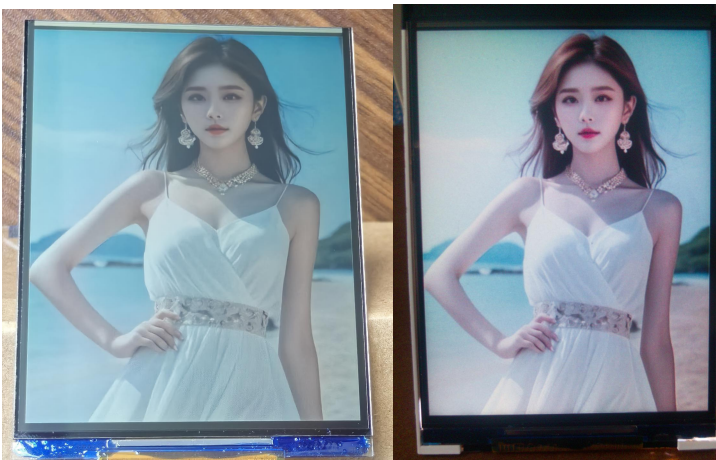8 显示效果




9 Optical Specifications 光学规格

9.1 Optical Specifications 光学规格

Ta=25°C, VDD=2.8V, TN LC+ Polarizer

	Item 项目	Symbol 标志	Condition 条件	Specification 规范			Unit 单位	
				Min. 最小	Typ. 中间	Max. 最大		
Backlight On (Transmissive Mode)	Luminance on surface($I_f=20mA$) 表面亮度	L_v	Normally viewing angle $\theta_x = \theta_y = 0^\circ$		150	-	cd/m ²	
	Contrast ratio 对比度 (Transmissive 透光)	CR		60	-	-	-	
	Contrast ratio 对比度 (Reflective 反光)	CR		10	-	-	-	
	Response time 响应时间	TR	-	10	20	ms		
		TF	-	20	30			
	Chromaticity Transmissive 色度	Red 红	XR	-	0.364	0.399	0.434	-
			YR		0.308	0.328	0.378	-
		Green 绿	XG		0.272	0.343	0.342	-
			YG		0.364	0.399	0.434	-
		Blue 蓝	XB		0.253	0.288	0.323	-
			YB		0.215	0.25	0.285	-
		White 白	XW		0.281	0.316	0.351	-
			YW		0.313	0.348	0.383	-
	Viewing Angle 视角	Horizontal	$\theta X+$	Center $CR \geq 10$	-	65	-	Deg.
			$\theta X-$		-	65	-	
Vertical		$\theta Y+$	-		65	-		
		$\theta Y-$	-		60	-		
Reflective 透光	$R\%$	-	5.5	-	-	%		
Transmission 反光	$T\%$	-	0.85	-	-	%		

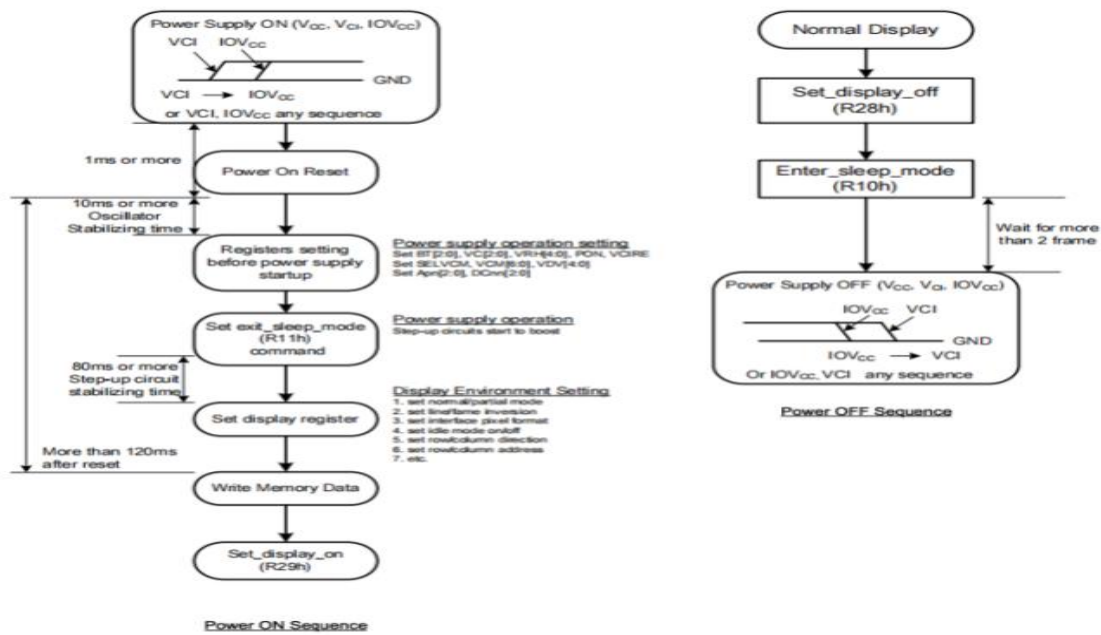9.2 The power on/off sequence is illustrated below 电源启动/关闭顺序




9.3 Definition of Contrast Ratio 对比度的定义

Contrast is measured perpendicular to display surface in reflective and transmissive mode. The measurement condition is:

Measuring Equipment 测量设备	BM-7 or EQUI
Measuring Point Diameter 测点直径	3mm//1mm
Measuring Point Location 测点位置	Active Area centre point
Test pattern 测试模式	A: All Pixels white
	B: All Pixel black
Contrast setting	Maximum

Definitions: CR (Contrast) = Luminance of White Pixel / Luminance of Black Pixel

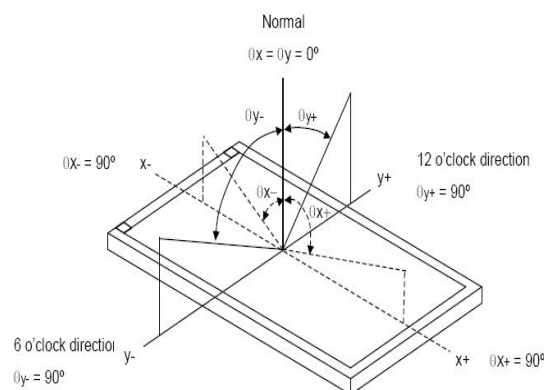9.4 Definition of Viewing Angles 视角的定义




Measuring machine: LCD-5100 or EQUI

9.5 Definition of Color Appearance 色域的定义

R,G,B and W are defined by (x, y) on the IE chromaticity diagram

NTSC=area of RGB triangle/area of NTSC triangleX100%

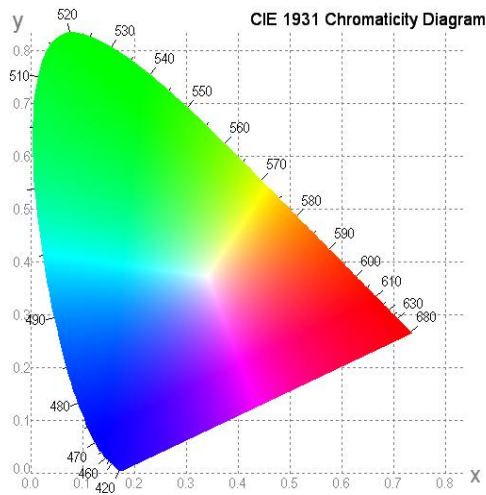Measuring picture: Red, Green, Blue and White (Measuring machine: BM-7)



9.6 Definition of Surface Luminance, Uniformity and Transmittance

表面亮度、均匀性和透光率的定义

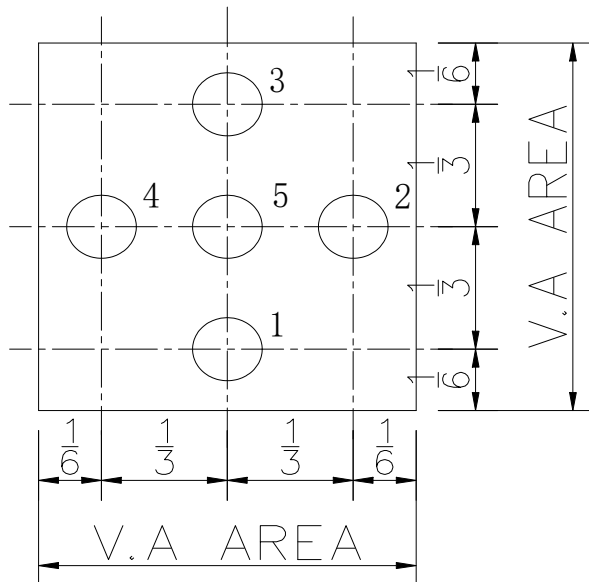
Using the transmissive mode measurement approach, measure the white screen luminance of the display panel and backlight.

9.6.1 Surface Luminance: $LV = \text{average} (LP1:LP5)$

9.6.2 Uniformity = $\text{Minimal} (LP1:LP5) / \text{Maximal} (LP1:LP5) * 100\%$

9.6.3 Transmittance = $LV \text{ on LCD} / LV \text{ on Backlight} * 100\%$

Note :Measuring machine:BM-7



10 Quality Assurance 质量标准

10.1 Purpose 目的

This standard for Quality Assurance assures the quality of LCD module products supplied to

customer by Tailorpixels .

10.2 Agreement Items 协议项目

Tailorpixels and customer shall negotiate if the following situation occurs:

10.2.1 Discrepancies between Tailorpixels 's QA standards and customer's QA standards.

10.2.2 Additional requirement to be added in product specification.

10.2.3 Any other special problem.

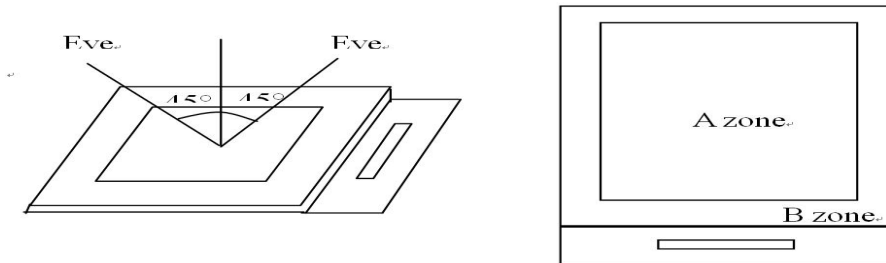
10.3 Standard of the Product Visual Inspection 产品外观检验标准

10.3.1 Appearance inspection:

10.3.1.1 The inspection must be under illumination about 1000 – 1500 lx, and the distance of view must be at 30cm ± 2cm.

10.3.1.2 The viewing angle should be 45° from the vertical line without reflection light or follows customer's viewing angle specifications.

10.3.1.3 Definition of area: A Zone: Active Area, B Zone: Viewing Area.



10.3.2 Basic principle:A set of sample to indicate the limit of acceptable quality level must be

discussed by both Tailorpixels and customer when there is any dispute happened.

10.4 Inspection Specification 检验标准




Sampling plan according to GB/T2828.1-2012/ISO 2859-1: 1999 and ANSI/ASQC





Z1.4-1993,normal level 2 and based on:




Major defect: AQL 0.4

Minor defect: AQL 1.0

No.	Item 项目	Criteria (Unit: mm) 标准
-----	---------	------------------------

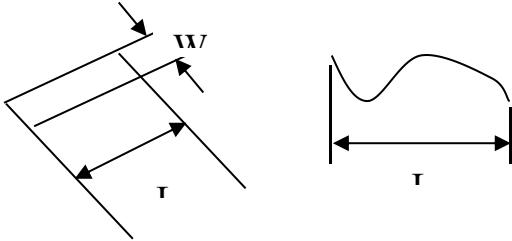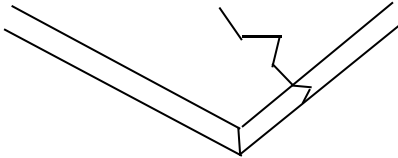No.	Item 项目	Criteria (Unit: mm) 标准															
01	Black / White spot Foreign material (Round type) Pinholes Stain Particles inside cell. (Minor defect) 黑/白斑/异物 (圆类型)细胞内的针孔染色颗粒。(小瑕疵)	 <table border="1" data-bbox="951 219 1433 622"> <thead> <tr> <th>Size</th> <th>Area</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$\phi \leq 0.10$</td> <td></td> <td>Ignore</td> </tr> <tr> <td>$0.10 < \phi \leq 0.2$</td> <td></td> <td>2</td> </tr> <tr> <td>$0.2 < \phi$</td> <td></td> <td>0</td> </tr> <tr> <td>Total</td> <td></td> <td>$N \leq 3$ NO include $\phi \leq 0.10$</td> </tr> </tbody> </table> <p>$\phi = (a + b) / 2$ Distance between 2 defects should more than 10mm apart.</p>	Size	Area	Acc. Qty	$\phi \leq 0.10$		Ignore	$0.10 < \phi \leq 0.2$		2	$0.2 < \phi$		0	Total		$N \leq 3$ NO include $\phi \leq 0.10$
Size	Area	Acc. Qty															
$\phi \leq 0.10$		Ignore															
$0.10 < \phi \leq 0.2$		2															
$0.2 < \phi$		0															
Total		$N \leq 3$ NO include $\phi \leq 0.10$															
02	Black and White line Scratch Foreign material (Line type) (Minor defect) 黑白线刮伤异物(类型)行 (小瑕疵)	 <table border="1" data-bbox="635 965 1259 1256"> <thead> <tr> <th>Length</th> <th>Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>/</td> <td>$W \leq 0.03$</td> <td>Ignore</td> </tr> <tr> <td>$L \leq 3$</td> <td>$0.05 < W \leq 0.08$</td> <td>2</td> </tr> <tr> <td>/</td> <td>$0.08 < W$</td> <td>0</td> </tr> <tr> <td colspan="2">Total</td> <td>$N \leq 2$</td> </tr> </tbody> </table> <p>Distance between 2 defects should more than 10mm apart. Scratches not viewable through the back of the display are acceptable.</p>	Length	Width	Acc. Qty	/	$W \leq 0.03$	Ignore	$L \leq 3$	$0.05 < W \leq 0.08$	2	/	$0.08 < W$	0	Total		$N \leq 2$
Length	Width	Acc. Qty															
/	$W \leq 0.03$	Ignore															
$L \leq 3$	$0.05 < W \leq 0.08$	2															
/	$0.08 < W$	0															
Total		$N \leq 2$															
03	Glass Crack (Minor defect) 玻璃裂纹(小瑕疵)	 <p>LCD with extensible crack line is unacceptable(When press the cracked LCD area, the line will expand, we define it is extensible crack line)</p>															

No.	Item 项目	Criteria (Unit: mm) 标准										
04	Glass Chipping Pad Area: (Minor defect) 玻璃碎片面积:(轻微缺陷) 	<table border="1"> <thead> <tr> <th data-bbox="775 250 1058 300">Length and Width</th> <th data-bbox="1058 250 1243 300">Acc. Qty</th> </tr> </thead> <tbody> <tr> <td data-bbox="775 300 1058 349">$c < 5.0, b < 0.4$</td> <td data-bbox="1058 300 1243 349">Ignore</td> </tr> </tbody> </table>	Length and Width	Acc. Qty	$c < 5.0, b < 0.4$	Ignore						
Length and Width	Acc. Qty											
$c < 5.0, b < 0.4$	Ignore											
05	Glass Chipping Rear of Pad Area: (Minor defect) 玻璃切屑垫区后方:(小瑕疵) 	<table border="1"> <thead> <tr> <th data-bbox="775 645 1058 694">Length and Width</th> <th data-bbox="1058 645 1243 694">Acc. Qty</th> </tr> </thead> <tbody> <tr> <td data-bbox="775 694 1058 743">$c > 3.0, b < 1.0$</td> <td data-bbox="1058 694 1243 743">1</td> </tr> <tr> <td data-bbox="775 743 1058 792">$c < 3.0, b < 1.0$</td> <td data-bbox="1058 743 1243 792">2</td> </tr> <tr> <td data-bbox="775 792 1058 842">$c < 3.0, b < 0.5$</td> <td data-bbox="1058 792 1243 842">4</td> </tr> <tr> <td colspan="2" data-bbox="775 842 1243 898" style="text-align: center;">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table>	Length and Width	Acc. Qty	$c > 3.0, b < 1.0$	1	$c < 3.0, b < 1.0$	2	$c < 3.0, b < 0.5$	4	$a < \text{Glass Thickness}$	
Length and Width	Acc. Qty											
$c > 3.0, b < 1.0$	1											
$c < 3.0, b < 1.0$	2											
$c < 3.0, b < 0.5$	4											
$a < \text{Glass Thickness}$												
06	Glass Chipping Except Pad Area: (Minor defect) 除垫区外的玻璃切屑:(小瑕疵) 	<table border="1"> <thead> <tr> <th data-bbox="775 1191 1058 1240">Length and Width</th> <th data-bbox="1058 1191 1243 1240">Acc. Qty</th> </tr> </thead> <tbody> <tr> <td data-bbox="775 1240 1058 1290">$c \leq 0.6, b < 5.0$</td> <td data-bbox="1058 1240 1243 1290">Ignore</td> </tr> <tr> <td colspan="2" data-bbox="775 1290 1243 1346" style="text-align: center;">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table>	Length and Width	Acc. Qty	$c \leq 0.6, b < 5.0$	Ignore	$a < \text{Glass Thickness}$					
Length and Width	Acc. Qty											
$c \leq 0.6, b < 5.0$	Ignore											
$a < \text{Glass Thickness}$												
07	Glass Corner Chipping: (Minor defect) 玻璃切角:(小瑕疵) 	<table border="1"> <thead> <tr> <th data-bbox="775 1585 1058 1635">Length and Width</th> <th data-bbox="1058 1585 1243 1635">Acc. Qty</th> </tr> </thead> <tbody> <tr> <td data-bbox="775 1635 1058 1684">$c < 2.0, b < 1.5$</td> <td data-bbox="1058 1635 1243 1684">Ignore</td> </tr> <tr> <td data-bbox="775 1684 1058 1733">$c < 1.5, b < 2$</td> <td data-bbox="1058 1684 1243 1733">Ignore</td> </tr> <tr> <td colspan="2" data-bbox="775 1733 1243 1789" style="text-align: center;">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table>	Length and Width	Acc. Qty	$c < 2.0, b < 1.5$	Ignore	$c < 1.5, b < 2$	Ignore	$a < \text{Glass Thickness}$			
Length and Width	Acc. Qty											
$c < 2.0, b < 1.5$	Ignore											
$c < 1.5, b < 2$	Ignore											
$a < \text{Glass Thickness}$												

No.	Item 项目	Criteria (Unit: mm) 标准										
08	Glass Burr: (Minor defect) 玻璃磨:(小瑕疵) 	Glass burr don't affect assemble and module dimension. <table border="1" data-bbox="774 313 1244 414"> <thead> <tr> <th>Length</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$F < 0.5$</td> <td>Ignore</td> </tr> </tbody> </table>	Length	Acc. Qty	$F < 0.5$	Ignore						
Length	Acc. Qty											
$F < 0.5$	Ignore											
09	FPC Defect: (Minor defect) FPC 缺陷:(小瑕疵) 	9.1 Dent, pinhole width $a < w/3$. (w: circuitry width.) 9.2 Open circuit is unacceptable. 9.3 No oxidation, contamination and distortion.										
10	Screen deformation 屏幕上的变形 	Test for insertion of plug gauge at highest warping point: (3.1-6.0inches) $H \leq 0.3MM$ The client has special requirements, according to drawing										
11	Bubble on Polarizer (Minor defect) 偏光片上的气泡(小瑕疵)	<table border="1" data-bbox="774 1243 1244 1489"> <thead> <tr> <th>Diameter</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$\varphi \leq 0.15$</td> <td>Ignore</td> </tr> <tr> <td>$0.15 < \varphi \leq 0.25$</td> <td>2</td> </tr> <tr> <td>$0.25 < \varphi \leq 0.3$</td> <td>1</td> </tr> <tr> <td>$0.3 < \varphi$</td> <td>0</td> </tr> </tbody> </table>	Diameter	Acc. Qty	$\varphi \leq 0.15$	Ignore	$0.15 < \varphi \leq 0.25$	2	$0.25 < \varphi \leq 0.3$	1	$0.3 < \varphi$	0
Diameter	Acc. Qty											
$\varphi \leq 0.15$	Ignore											
$0.15 < \varphi \leq 0.25$	2											
$0.25 < \varphi \leq 0.3$	1											
$0.3 < \varphi$	0											
12	Dent on Polarizer (Minor defect) 偏光片上的凹痕(小瑕疵)	<table border="1" data-bbox="774 1512 1244 1758"> <thead> <tr> <th>Diameter</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$\varphi \leq 0.15$</td> <td>Ignore</td> </tr> <tr> <td>$0.15 < \varphi \leq 0.25$</td> <td>2</td> </tr> <tr> <td>$0.25 < \varphi \leq 0.30$</td> <td>1</td> </tr> <tr> <td>$0.3 < \varphi$</td> <td>0</td> </tr> </tbody> </table>	Diameter	Acc. Qty	$\varphi \leq 0.15$	Ignore	$0.15 < \varphi \leq 0.25$	2	$0.25 < \varphi \leq 0.30$	1	$0.3 < \varphi$	0
Diameter	Acc. Qty											
$\varphi \leq 0.15$	Ignore											
$0.15 < \varphi \leq 0.25$	2											
$0.25 < \varphi \leq 0.30$	1											
$0.3 < \varphi$	0											
13	Bezel 边框	13.1 No rust, distortion on the Bezel.										

No.	Item 项目	Criteria (Unit: mm) 标准
14	Touch Panel 触控面板	<p>D: Diameter W: width L: length</p> <p>14.1 Spot: $D \leq 0.20$ is acceptable $0.20 < D \leq 0.3$, acceptable QTY, 3 $D > 0.3$ is unacceptable</p> <p>14.2 Dent (dot): $D \leq 0.20$ is acceptable $0.20 < D \leq 0.3$, acceptable QTY, 3 $D > 0.30$ is unacceptable 2dots are acceptable and the distance between defects should more than 10 mm.</p> <p>Dent (line) According to the limit sample</p> <p>14.3 Scratch: $W \leq 0.03$, $L \leq 10$ is acceptable, $0.03 < W \leq 0.10$, $L \leq 10$, acceptable QTY, 3 $W > 0.10$ is unacceptable. Distance between 2 defects should more than 10 mm.</p>
15	PCB	<p>15.1 No distortion or contamination on PCB terminals.</p> <p>15.2 All components on PCB must same as documented on the BOM/component layout.</p> <p>15.3 Follow IPC-A-600F.</p>
16	Soldering 焊接	Follow IPC-A-610C standard

No.	Item 项目	Criteria (Unit: mm) 标准
17	Electrical Defect (Major defect) 电气 缺陷(主要缺陷)	The below defects must be rejected. 17.1 Missing vertical / horizontal segment, 17.2 Abnormal Display. 17.3 No function or no display. 17.4 Current exceeds product specifications. 17.5 LCD viewing angle defect. 17.6 No Backlight. 17.7 Dark Backlight. 17.8 Touch Panel no function. 17.9 Dark Dot –one Allowed. 17.10 Bright Dot – one Allowed. Remark: 1. A pixel defect is acceptable if one color is none functional and causes a bright dot. The display may have one case where one color is out and cause a dark dot. 2. Bright dot caused by scratch and foreign object accords to item1.
18	Light leak 漏光	Yellow light OK; White light,According to the limit sample

Remark: Visual and cosmetic defects are rejectable only if these fall within the LCD viewing area.

10.5 Classification of Defects 缺陷的分类

Visual defects (Except no / wrong label) are treated as minor defect and electrical defect is major.

10.6 Identification/marketing criteria 识别/评分标准

Any unit with illegible / wrong /double or no marking/ label shall be rejected.

10.7 Packing 包装

10.7.1 There should be no damage of the outside carton box, each packaging box should has label in the correct location per packing drawing requirement.

10.7.2 All direct package materials shall offer ESD protection.

11 Reliability Specification 可靠性规范

Item 项目	Condition 条件	Cycle Time 周期时间	Quantity 数量	Remark 备注
Constant Temp. and Constant Humidity Operation Test 恒温恒湿运行试验	+40 ± 3°C, 90 ± 3%RH	96hrs	--	*1
High Temp. Operation Test 高温操作试验	+70 ± 3°C	96hrs	--	
Low Temp. Operation Test 低温操作试验	-20 ± 3°C	96hrs	--	
Thermal Shock Test 热冲击试验	-20 ± 3°C (30min) +70 ± 3°C (30min)	10cycles	--	
ESD Test(end product) ESD 测试 (最终产品)	150pF, 330Ω, ±2KV, Contact	10times	--	*2, *3
	150pF, 330Ω, ±6KV, Air			
Vibration Test (for packaging) 振动测试(包装)	Frequency: 10Hz to 55Hz to 10Hz, Swing: 1.5mm, time: X, Y, Z each 2H.	6hrs	One inner carton	*4

Note 1. For humidity test, DI water should be used.

Inspection Standard: Inspect after 1-2hrs storage at room temperature, the sample shall be free from the following defects:

- Air bubble in the LCD
- Seal Leakage
- Non-display
- Missing Segment
- Glass Crack
- IDD is greater than twice initial value.
- Others as per QA Inspection Criteria

Note 2. No defect is allowed after testing

The End Product ESD value is only indicative and depends on customer ESD protection design for the whole system.

Note 3. ESD should be applied to LCD glass panel, not other areas (such as on IC and so on) IDD should be within twice initial value.

In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.

Note 4. Only upon request.

12 Precautions and Warranty 注意事项和保证

12.1 Safety 安全

12.1.1 The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

12.1.2 Since the liquid crystal cells are made of glass, do not apply strong impact on them. Handle with care.

12.2 Handling 处理

12.2.1 Reverse and use within ratings in order to keep performance and prevent damage.

12.2.2 Do not wipe the polarizer with dry cloth, as it might cause scratch. If the surface of the LCD needs to be cleaned, wipe it swiftly with cotton or other soft cloth soaked with petroleum IPA, do not use other chemicals.

12.3 Operation 操作

12.3.1 Do not drive LCD with DC voltage

12.3.2 Response time will increase below lower temperature

12.3.3 Display may change color with different temperature

12.3.4 Mechanical disturbance during operation, such as pressing on the display area, may cause the segments to appear “fractured”.

12.4 Static Electricity 静电

12.4.1 CMOS LSIs are equipped in this unit, so care must be taken to avoid the electro-static charge, by ground human body, etc.

12.4.2 The normal static prevention measures should be observed for work clothes and benches.

12.4.3 The module should be kept into anti-static bags or other containers resistant to static for storage.

12.5 Limited Warranty 有限质量保证

12.5.1 Unless otherwise agreed between Tailorpixels and customer, Tailorpixels will replace or repair any of its LCD and LCM which Tailorpixels found to be defective electrically and visually when inspected in accordance with Tailorpixels Quality Standards, for a period of one year from date of shipment.

12.5.2 The warranty liability of Tailorpixels is limited to repair and/or replacement. Tailorpixels will not be responsible for any consequential loss.

12.5.3 If possible, we suggest you use up all modules in six months. If the module storage time over twelve months, we suggest that recheck it before the module be used.

13 Packaging 包装

TBD

14 Prior Consult Matter 免责声明

1. For Tailorpixels standard products, we keep the right to change material, process for improving the product property without prior notice to our customer.

2. For OEM products, if any changes are needed which may affect the product property, we will consult with our customer in advance.

3. If you have special requirement about reliability condition, please let us know before you start the test on our samples.

Reference 参考

Item 项目	Description 描述	Revision 修订
ST7701	IC Data sheet	V0
Panel 3.97 480X800	LCM assembly drawing	V3