



Item	Date	Remark
A	20190603	Original Drawing

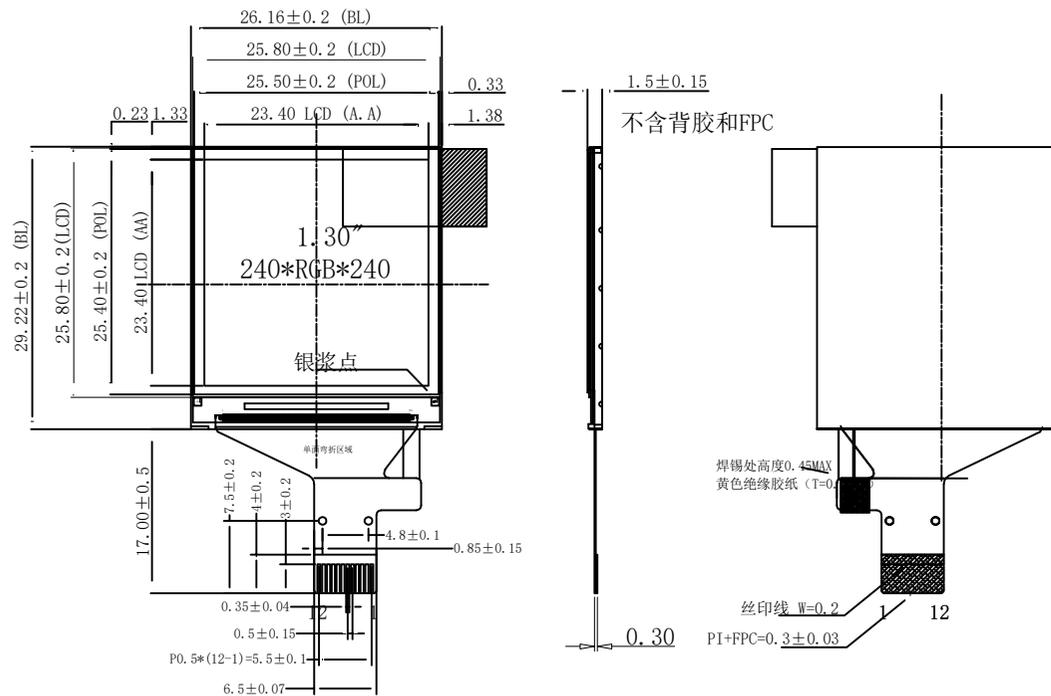

PIN	DESCRIPTION
1	GND
2	LEDK
3	LEDA
4	VDD
5	GND
6	GND
7	D/C
8	CS
9	SCL
10	SDA
11	RESET
12	GND



LED CIRCUIT DIAGRAM:

- NOTES:
1. DISPLAY TYPE: 1.3" TFT
  2. VIEWING DIRECTION: A11
  3. POLARIZER MODE: TRANSMISSIVE/NORMALLY BLACK
  4. DRIVER IC: ST7789P3
  5. OPERATING TEMP.: -20° C~70° C
  6. STORAGE TEMP.: -30° C~80° C
  7. BACK LIGHT: 2CHIP-WHITE LED; 40MA, 3.0V
  8. LCM Luminance: 350 CD/M2(TYP)
  9. UNMARKED TOLERANCE: ±0.2
  10. 建议机壳开窗可视区比 LCD A.A区单边大 0.3mm
  11. 产品符合ROHS标准

Customer Approval Signature						Drawing Number	Rev.
						1.3" TFT	A
		Title				Material	
		TTJ130XSS-02				Soda Lime / Polyimide	
		Tolerance		Drawn	E. E.	Panel / E.	P. M.
		Dimension	±0.3	By	Jesen		
		Angle	±1	Date	20190603		
						Scale	Sheet
						1:1	1 of 1
						Size	
						A3	